## CL Challenger Lifts



Model#: SRM7 7,000 lb. capacity Short-Rise Lift

SRM7

The SRM7 is a great choice for brake and tire servicing needs. Dual hydraulic cylinders provide a 7,000 lb. lifting capacity picking up vehicles ranging from small passenger cars to light trucks.

Standard 2 position spotting blocks and auxiliary adapters reach a wide range of vehicle pick up points. Lug nuts and other small parts are always within reach with the SRM7's inset storage trays. Its small footprint compared to other lift models make the SRM7 a perfect fit.




## Features & Benefits:

- Challenger Lifts' SRM7 short-rise pad lift comes standard with 4 two position adapter blocks and 4 spotting block auxiliary adapters for increased vehicle spotting versatility
- Standard storage trays are conveniently placed on each side of the lift to prevent lug nuts and other small parts from being misplaced
- Dual cylinders provide stable 7,000 lb. lifting capabilities to accommodate a wide range of vehicles
- Diamond plated approach ramps help to prevent slipping
- 3 locking positions allows technician to work at their ergonomic working height to increase productivity and minimize fatigue
- Powder coat finish provides long lasting durable finish

## standard features:








Four  $4^{1/8}$ " spotting block auxiliary adapters included Part#: 63100

For more information, contact your Authorized Challenger Lifts Distributor:

SRM7	Specifications
Lifting Capacity	7,000 lb. (3175kg)
A. Raised Height	22" (559mm)
Lowered Height	<b>4</b> <sup>1</sup> /4" (108mm)
Locking Bar Heights	13 <sup>13</sup> /16", 18 <sup>3</sup> /8", 21 <sup>1</sup> /4" (351mm, 467mm, 540mm)
B. Low Adapter Position	4 <sup>3</sup> /4" (121mm)
C. High Adapter Position	6 <sup>3</sup> /4" (171mm)
D. Overall Width	7′1″ (2159mm)
E. Outside Width of Platforms	72" (1829mm)
F. Width between Platforms	23" (584mm)
G. Platform Overall Length	50" (1270mm)
H. Ramp & Platform Overall Length	77 <sup>3</sup> /4" (1975mm)
I. Overall Length	90 <sup>1</sup> /2" (2299mm)
Rearward Movement	13 <sup>1</sup> /4" (337mm)
Motor	1HP, Single Phase, 60Hz
Voltage	115v

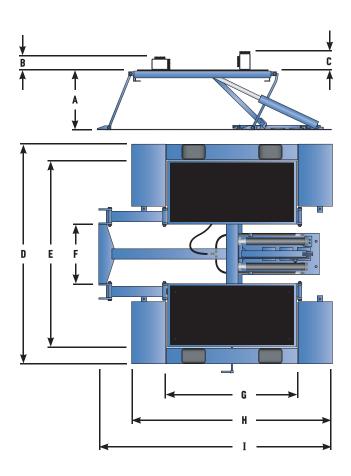







CHALLENGER LIFTS, INC. Phone Toll-Free: 800-648-5438 200 Cabel Street Louisville, Kentucky 40206

502-625-0700 Fax: 502-625-0711 E-mail: sales@challengerlifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.

GSA CONTRACT# GS-07F-8950D • CAGE CODE OKD44 SIN#'s 253-23, 253-23A, 253-38 • DUNS# 79-435-3680